

# SASSO 40 round downlight

trim

048-2800614M 048-2896317 002-90745



Projet / Type

Notes

Quantité / Date



↑ IP20  
↓ IP44

220-240V

↺  
↻

X-PERT

UGR  
≤ 16

CRI  
≥ 90

X-PERT

## Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage blanc signalisation

avant IP44 , arrière IP20

482 lm

## LED

4000 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 89 , R<sub>(f-15)</sub>: 91

MR 0.85

MDER 0.77

## Optique

medium

beam angle 29°

UGR < 16

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

## Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

49 lm/W

insert 65 lm/W

## Physique

bord

diameter 60 mm

hauteur 50 mm

0.21 kg

## Découpe

diameter 56 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 110 mm

<sup>1</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

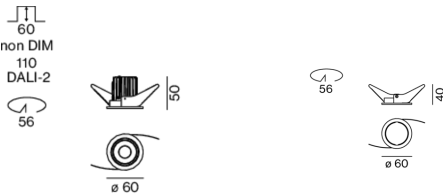

## Notice de montage



## Calculateur d'éclairage

