

SASSO 40 round downlight

trim

048-2800614M 048-2896317 002-90744



Projet / Type

Notes

Quantité / Date



↑ IP20
↓ IP44

220-240V

UGR
≤ 16

CRI
≥ 90

Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage blanc signalisation

avant IP44 , arrière IP20

482 lm

LED

4000 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 97 , R_f: 89 , R_(f-15): 91

MR 0.85

MDER 0.77

Optique

medium

beam angle 29°

UGR < 16

P_{stLM} ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

non DIM

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

49 lm/W

insert 65 lm/W

Physique

bord

diameter 60 mm

hauteur 50 mm

0.6 kg

Découpe

diameter 56 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 60 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

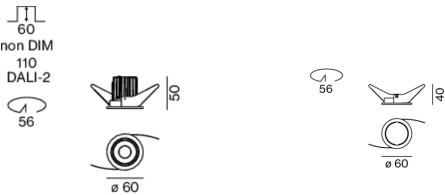

Notice de montage



Calculateur d'éclairage

