

# SASSO 40 round downlight

trimless

048-2800414S 048-2896117 002-90744



Projet / Type

Notes

Quantité / Date



↑ IP20  
↓ IP44

220-240V

360°

X-PERT

UGR  
≤13

CRI  
≥90

X-PERT

### Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage blanc signalisation

avant IP44 , arrière IP20

436 lm

### LED

2700 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>f(1-5)</sub>: 86

MR 0.49

MDER 0.44

### Optique

spot

beam angle 17°

UGR < 13

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

### Electrique

non DIM

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

44 lm/W

insert 59 lm/W

### Physique

sans bord

diameter 56 mm

hauteur 50 mm

0.61 kg


### Découpe

diameter 56 mm


recessed depth 60 mm

<sup>1</sup> Valeur du produit contenant à pleine charge (non atténué)

### Répartition de la lumière



### Dessin de fabrication

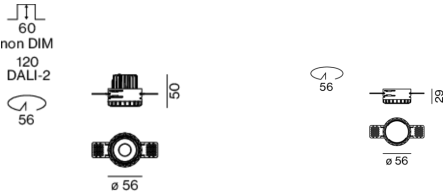

### Notice de montage



### Calculateur d'éclairage

