

SASSO 40 round downlight

trimless

048-2800414M 048-2896117 002-90745



Projet / Type

Notes

Quantité / Date



↑ IP20
↓ IP44

220-240V

360°

X-PERT

UGR
≤ 16

CRI
≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage blanc signalisation

avant IP44 , arrière IP20

436 lm

LED

2700 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 100 , R_f: 89 , R₍₁₋₁₅₎: 86

MR 0.49

MDER 0.44

Optique

medium

beam angle 29°

UGR < 16

P_{stLM} ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

44 lm/W

insert 58 lm/W

Physique

sans bord

diameter 56 mm

hauteur 50 mm

0.22 kg


Découpe

diameter 56 mm


recessed depth 120 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

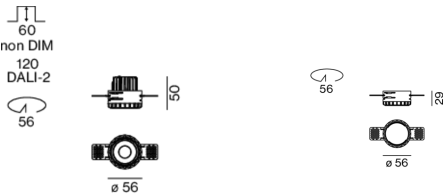

Notice de montage



Calculateur d'éclairage

