

# SASSO 40 round downlight

trimless

048-2800411S 048-2896117 002-90745



Projet / Type

Notes

Quantité / Date



↑ IP20  
↓ IP44

220-240V

↻

X-PERT

UGR  
≤13

CRI  
≥90

X-PERT

## Général

Plafond , Encastré

rotation 360°

noir , RAL9005 <sup>1</sup>

Set de montage blanc signalisation

avant IP44 , arrière IP20

421 lm

## LED

2700 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>f(1-15)</sub>: 86

MR 0.49

MDER 0.44

## Optique

spot

beam angle 17°

UGR < 13

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrique

DALI-2

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

43 lm/W

insert 57 lm/W

## Physique

sans bord

diameter 56 mm

hauteur 50 mm

0.22 kg

## Découpe


diameter 56 mm

recessed depth 120 mm


<sup>1</sup> Code RAL

<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

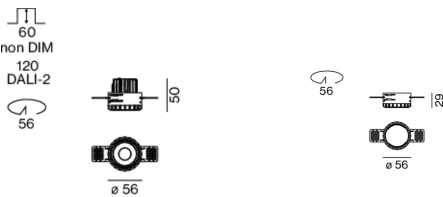

## Notice de montage



## Calculateur d'éclairage

