

SASSO 40 round downlight

trim

048-2800411M 048-2896317 002-90745



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré
rotation 360°
noir , RAL9005 ¹
Set de montage blanc signalisation
avant IP44 , arrière IP20
410 lm

LED

2700 K
CRI ≥ 90
L85 / 50000 h
MacAdam initial ≤ 3 SDCM
R_g: 100 , R_f: 89 , R_{f(1-5)}: 86
MR 0.49
MDER 0.44

Optique

medium
beam angle 29°
UGR < 16
P_{stLM} ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrique

DALI-2
9.9 W
insert 7.5 W
36 Vf
200 mA
CP2 220-240V
41 lm/W
insert 55 lm/W


Physique

bord
diameter 60 mm
hauteur 50 mm
0.21 kg


Découpe

diameter 56 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

Répartition de la lumière



Dessin de fabrication

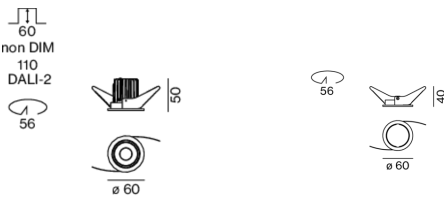

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

