

# SASSO 40 round downlight

trim

048-2800411F 048-2896318 002-90744



Projet / Type

Notes

Quantité / Date



↑ P20  
↓ P44

220-240V

360°

X-PEST

UGR  
≤ 19

cd/m²  
≤ 3000

CRI  
≥ 90

X-PEST

## Général

Plafond , Encastré

rotation 360°

noir , RAL9005 <sup>1</sup>

Set de montage Noir profond

avant IP44 , arrière IP20

381 lm

## LED

2700 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>f(1-5)</sub>: 86

MR 0.49

MDER 0.44

## Optique

flood

beam angle 43°

UGR < 19 , ≥ 65° < 3000 cd/m²

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrique

non DIM

9.9 W

insert 7.5 W

36 Vf

200 mA

CP2 220-240V

38 lm/W

insert 51 lm/W

## Physique

bord

diameter 60 mm

hauteur 50 mm

0.59 kg

## Découpe

diameter 56 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 60 mm

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

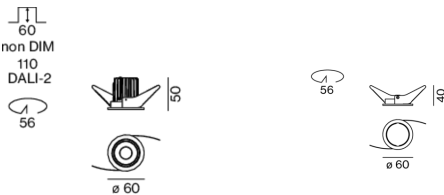

## Notice de montage



## Calculateur d'éclairage

