

SASSO 100 round wallwasher

trimless

048-2740617A 048-2796117 002-90779



Projet / Type _____

Notes _____

Quantité / Date _____



220-240V

360°

X-PERT

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 ¹

Set de montage blanc signalisation

IP20

1660 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 94 , R_f: 87 , R_{f(1-15)}: 86

MR 0.8

MDER 0.72

Optique

wallwasher

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

20.3 W

insert 17.3 W

36 Vf

250 mA

CP2 220-240V

82 lm/W

insert 96 lm/W

Physique

sans bord

diameter 105 mm

hauteur 96 mm

0.72 kg

Découpe

diameter 106 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 120 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

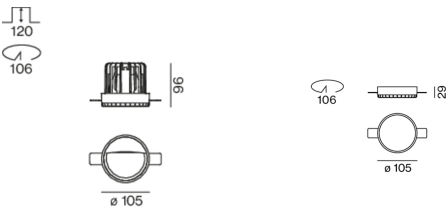

Notice de montage



Calculateur d'éclairage

