

# SASSO 100 round wallwasher/floor

trim

048-2740619W 048-2796318 002-90779



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



220-240V

360°

X-PERT

CRI ≥ 90

X-PERT

## Général

Plafond , Encastré

rotation 360°

or , RAL260-M <sup>1</sup>

Set de montage Noir profond

IP20

2030 lm

## LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 89

MR 0.81

MDER 0.74

## Optique

wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrique

DALI-2

19.2 W

insert 16.3 W

36 Vf

500 mA

CP2 220-240V

106 lm/W

insert 124 lm/W

## Physique

bord

diameter 118 mm

hauteur 96 mm

0.7 kg

## Découpe

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm


<sup>1</sup> Code RAL

<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

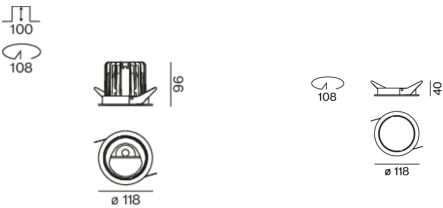

## Notice de montage



## Calculateur d'éclairage

