

SASSO 100 round wallwasher/floor

trim

048-2740417W 048-2796318 002-90777



Projet / Type

Notes

Quantité / Date



220-240V

rotation 360°

X-PERT

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 ¹

Set de montage Noir profond

IP20

1870 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optique

wallwasher floor

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

19.2 W

insert 16.3 W

36 Vf

500 mA

CP2 220-240V

97 lm/W

insert 115 lm/W

Physique

bord

diameter 118 mm

hauteur 96 mm

0.67 kg

Découpe

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

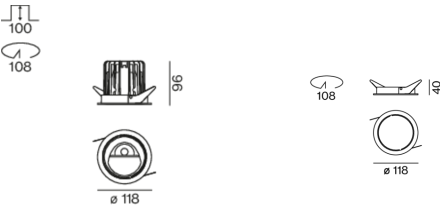

Notice de montage



Calculateur d'éclairage

