

SASSO 100 round wallwasher/floor

trim

048-2740411W 048-2796317 002-90779



Projet / Type

Notes

Quantité / Date



220-240V

rotation 360°

X-PERT

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

noir , RAL9005 ¹

Set de montage blanc signalisation

IP20

1830 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optique

wallwasher floor

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

19.2 W

insert 16.3 W

36 Vf

500 mA

CP2 220-240V

95 lm/W

insert 112 lm/W

Physique

bord

diameter 118 mm

hauteur 96 mm

0.7 kg

Découpe

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

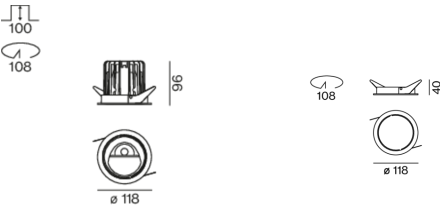

Notice de montage



Calculateur d'éclairage

