

SASSO 100 round wallwasher/floor

trimless

048-2740417W 048-2796117 002-90776



Projet / Type _____

Notes _____

Quantité / Date _____



220-240V

360°

X-PERT

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 ¹

Set de montage blanc signalisation

IP20

2530 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optique

wallwasher floor

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

27.5 W

insert 23.4 W

36 Vf

700 mA

CP2 220-240V

92 lm/W

insert 108 lm/W

Physique

sans bord

diameter 105 mm

hauteur 96 mm

0.71 kg

Découpe


diameter 106 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm

Répartition de la lumière



Dessin de fabrication

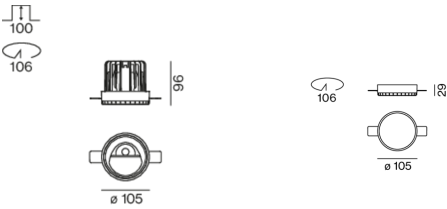

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

