

SASSO 100 round wallwasher/floor

trimless

048-2740511W 048-2796117 002-90777



Projet / Type _____

Notes _____

Quantité / Date _____



220-240V

rotation 360°

X-PERT

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

noir , RAL9005 ¹

Set de montage blanc signalisation

IP20

1950 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 100 , R_f: 91 , R_{f1-15}: 88

MR 0.59

MDER 0.53

Optique

wallwasher floor

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

19.2 W

insert 16.3 W

36 Vf

500 mA

CP2 220-240V

102 lm/W

insert 119 lm/W

Physique

sans bord

diameter 105 mm

hauteur 96 mm

0.69 kg

Découpe


diameter 106 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm

Répartition de la lumière



Dessin de fabrication

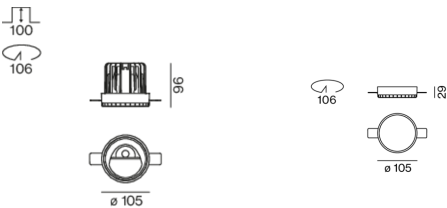

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

