

SASSO 100 square downlight

trimless

048-2710619W 048-2797117 002-90779



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré
or , RAL260-M¹
Set de montage blanc signalisation
avant IP44 , arrière IP20
1820 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 97 , R_f: 90 , R_{t(1-15)}: 89
MR 0.81
MDER 0.74


Optique

wide flood
beam angle 65°
≥65° <1500 cd/m²
PstLM ≤ 1.0²
SVM ≤ 0.4²


Electrique

DALI-2
20.2 W
insert 17.2 W
36 V
500 mA
CP2 220-240V
90 lm/W
insert 106 lm/W
1 DALI Addr.

Répartition de la lumière



Dessin de fabrication

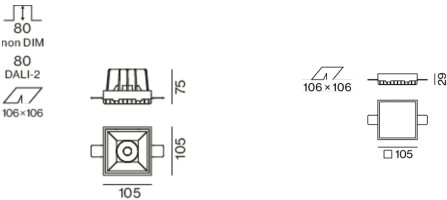

Physique

sans bord
length 105 mm
width 105 mm
hauteur 75 mm
0.52 kg

Découpe

length 106 mm
width 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)



SASSO 100 square downlight

trimless

048-2710619W 048-2797117 002-90779



Projet / Type

Notes

Quantité / Date

Notice de
montage



Calculateur
d'éclairage

