

# SASSO 100 square downlight

trimless

048-2710619S 048-2797117 002-90777



Projet / Type

Notes

Quantité / Date



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤13

cd/m²  
≤3000

CRI  
≥90

X-PERT

### Général

Plafond , Encastré

or , RAL260-M<sup>1</sup>

Set de montage blanc signalisation

avant IP44 , arrière IP20

1580 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>i(1-15)</sub>: 89

MR 0.81

MDER 0.74

### Optique

spot

beam angle 20°

UGR < 13 , ≥65° <3000 cd/m²

PstLM ≤ 1.0<sup>2</sup>

SVM ≤ 0.4<sup>2</sup>

### Electrique

non DIM

20.2 W

insert 17.2 W

36 V<sub>f</sub>

500 mA

CP2 220-240V

78 lm/W

insert 92 lm/W

### Physique

sans bord

length 105 mm

width 105 mm

hauteur 75 mm

0.49 kg

### Découpe

length 106 mm


width 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

### Répartition de la lumière



### Dessin de fabrication

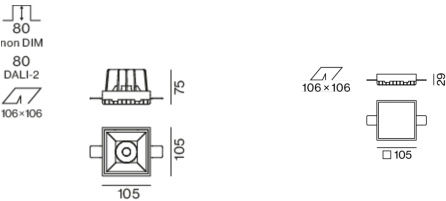

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

### Notice de montage



### Calculateur d'éclairage

