

SASSO 100 square downlight

trim

048-2710517S 048-279731G 002-90779



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré
blanc , RAL9016 ¹
Set de montage aluminium blanc
avant IP44 , arrière IP20
1540 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 100 , R_f: 91 , R_{f(1-15)}: 88
MR 0.59
MDER 0.53


Optique

spot
beam angle 19°
UGR < 16
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²


Electrique

DALI-2
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
76 lm/W
insert 90 lm/W
1 DALI Addr.

Répartition de la lumière



Dessin de fabrication

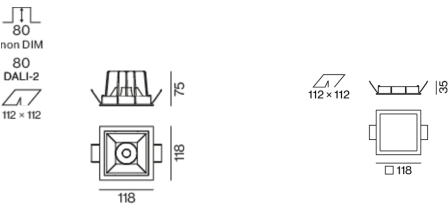

Physique

bord
length 118 mm
width 118 mm
hauteur 75 mm
0.54 kg

Découpe

length 112 mm
width 112 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)



SASSO 100 square downlight

trim

048-2710517S 048-279731G 002-90779



Projet / Type

Notes

Quantité / Date

Notice de
montage



Calculateur
d'éclairage

