

SASSO 100 round downlight

trim

048-2700619S 048-2796318 002-90777



Projet / Type _____

Notes _____

Quantité / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤13

cd/m²
≤3000

CRI
≥90

X-PERT

Général

Plafond , Encastré
or , RAL260-M¹
Set de montage Noir profond
avant IP44 , arrière IP20
1530 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 97 , R_f: 90 , R_{t(1-15)}: 89
MR 0.81
MDER 0.74

Optique

spot
beam angle 19°
UGR < 13 , ≥65° <3000 cd/m²
PstLM ≤ 1.0²
SVM ≤ 0.4²

Electrique

non DIM
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
76 lm/W
insert 89 lm/W

Physique


bord
diameter 118 mm
hauteur 75 mm
0.47 kg

Découpe


diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

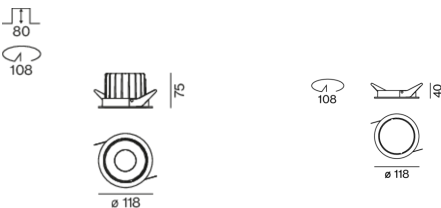

Notice de montage



Calculateur d'éclairage

