

# SASSO 100 round downlight

trim

048-2700619S 048-2796317 002-90776



Projet / Type

Notes

Quantité / Date



↑ P20  
↓ P44

220-240V

X-PERT

UGR  
≤13

cd/m<sup>2</sup>  
≤3000

CRI  
≥90

MACADAM  
LADOR

X-PERT

### Général

Plafond , Encastré

or , RAL260-M<sup>1</sup>

Set de montage blanc signalisation

avant IP44 , arrière IP20

2020 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.81

MDER 0.74

### Optique

spot

beam angle 19°

UGR < 13 , ≥65° <3000 cd/m<sup>2</sup>

PstLM ≤ 1.0<sup>2</sup>

SVM ≤ 0.4<sup>2</sup>

### Electrique

DALI-2

29.2 W

insert 24.8 W

36 Vf

700 mA


CP2 220-240V

69 lm/W


insert 81 lm/W

1 DALI Addr.

### Répartition de la lumière



### Dessin de fabrication

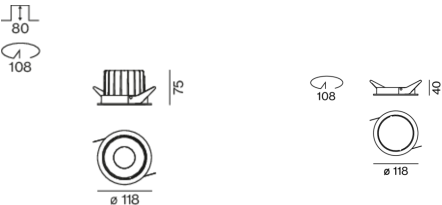

### Physique

bord

diameter 118 mm

hauteur 75 mm

0.49 kg

### Découpe

diameter 108 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 80 mm

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

### Notice de montage



### Calculateur d'éclairage

