

SASSO 100 round downlight

trim

048-2700619M 048-279631G 002-90777



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré
or , RAL260-M¹
Set de montage aluminium blanc
avant IP44 , arrière IP20
1540 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 97 , R_f: 90 , R_{t(1-15)}: 89
MR 0.81
MDER 0.74

Optique

medium
beam angle 33°
UGR < 13 , ≥ 65° < 3000 cd/m²
PstLM ≤ 1.0²
SVM ≤ 0.4²

Electrique

non DIM
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
76 lm/W
insert 89 lm/W

Physique


bord
diameter 118 mm
hauteur 75 mm
0.47 kg

Découpe


diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

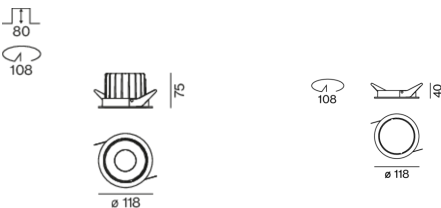

Notice de montage



Calculateur d'éclairage

