

SASSO 100 round downlight

trimless

048-2700614W 048-2796117 002-90779



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré
argent mat
Set de montage blanc signalisation
avant IP44 , arrière IP20
1800 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
 $R_g: 97, R_f: 90, R_{f(1-15)}: 89$
MR 0.81
MDER 0.74


Optique

wide flood
beam angle 65°
 $\geq 65^\circ < 1500 \text{ cd/m}^2$
 $\text{PstLM} \leq 1.0^1$
 $\text{SVM} \leq 0.4^1$


Electrique

DALI-2
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
89 lm/W
insert 105 lm/W
1 DALI Addr.

Répartition de la lumière



Dessin de fabrication

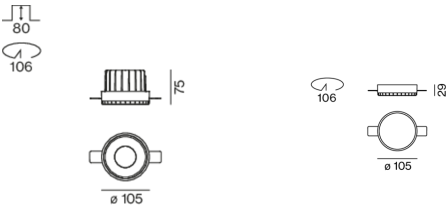

Physique

sans bord
diamètre 105 mm
hauteur 75 mm
0.53 kg

Découpe

diamètre 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

