

SASSO 100 round downlight

trimless

048-2700611S 048-2796117 002-90774



Projet / Type _____

Notes _____

Quantité / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤13

cd/m²
≤3000

CRI
≥90

X-PERT

Général

Plafond , Encastré

noir , RAL9005 ¹

Set de montage blanc signalisation

avant IP44 , arrière IP20

1940 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 97 , R_f: 90 , R₍₁₋₁₅₎: 89

MR 0.81

MDER 0.74

Optique

spot

beam angle 19°

UGR < 13 , ≥65° <3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

29.2 W

insert 24.8 W

36 Vf

700 mA

CP2 220-240V

66 lm/W

insert 78 lm/W

Physique

sans bord

diameter 105 mm

hauteur 75 mm

0.47 kg

Découpe

diameter 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

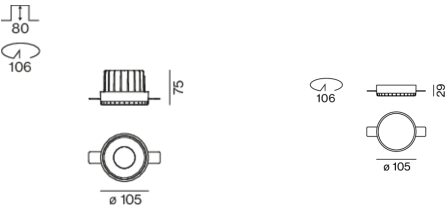

Notice de montage



Calculateur d'éclairage

