

SASSO 100 round downlight

trim

048-2700519S 048-2796317 002-90779



Projet / Type _____

Notes _____

Quantité / Date _____



↑ F20
↓ F44

220-240V

X-PERT

UGR
≤ 13

cd/m²
≤ 3000

CRI
≥ 90

MACOS
MACOR

X-PERT

Général

Plafond , Encastré
or , RAL260-M¹
Set de montage blanc signalisation
avant IP44 , arrière IP20
1450 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88
MR 0.59
MDER 0.53


Optique

spot
beam angle 19°
UGR < 13 , ≥ 65° < 3000 cd/m²
PstLM ≤ 1.0²
SVM ≤ 0.4²


Electrique

DALI-2
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
72 lm/W
insert 84 lm/W
1 DALI Addr.

Répartition de la lumière



Dessin de fabrication

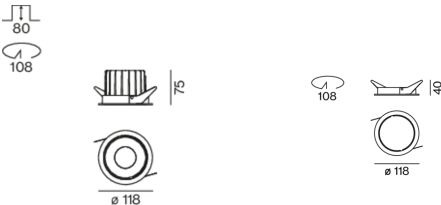

Physique

bord
diameter 118 mm
hauteur 75 mm
0.5 kg

Découpe

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

