

# SASSO 100 round downlight

trim

048-2700611F 048-279631G 002-90777



Projet / Type

Notes

Quantité / Date



## Général

Plafond , Encastré  
noir , RAL9005 <sup>1</sup>  
Set de montage aluminium blanc  
avant IP44 , arrière IP20  
1670 lm

## LED

4000 K  
CRI ≥ 90  
L80 / 50000 h  
MacAdam initial ≤ 2 SDCM  
R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 89  
MR 0.81  
MDER 0.74

## Optique

flood  
beam angle 45°  
UGR < 16 , ≥65° <1500 cd/m²  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrique

non DIM  
20.2 W  
insert 17.2 W  
36 Vf  
500 mA  
CP2 220-240V  
83 lm/W  
insert 97 lm/W


## Physique

bord  
diameter 118 mm  
hauteur 75 mm  
0.47 kg


## Découpe

diameter 108 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 80 mm

## Répartition de la lumière



## Dessin de fabrication

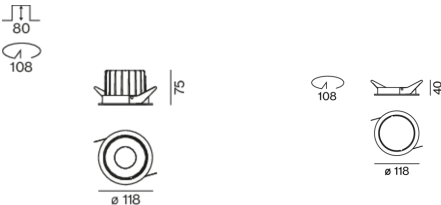

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Notice de montage



## Calculateur d'éclairage

