

SASSO 100 round downlight

trim

048-2700517W 048-279631G 002-90776



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré
blanc , RAL9016 ¹
Set de montage aluminium blanc
avant IP44 , arrière IP20
2230 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88
MR 0.59
MDER 0.53

Optique

wide flood
beam angle 66°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrique

DALI-2
29.2 W
insert 24.8 W
36 Vf
700 mA
CP2 220-240V
76 lm/W
insert 90 lm/W
1 DALI Addr.


Physique

bord
diameter 118 mm
hauteur 75 mm
0.49 kg


Découpe

diameter 108 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Répartition de la lumière



Dessin de fabrication

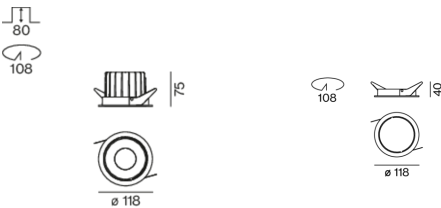

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

