

SASSO 100 round downlight

trimless

048-2700519S 048-2796117 002-90777



Projet / Type _____

Notes _____

Quantité / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤13

cd/m²
≤3000

CRI
≥90

X-PERT

Général

Plafond , Encastré
or , RAL260-M¹
Set de montage blanc signalisation
avant IP44 , arrière IP20
1450 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 100 , R_f: 91 , R_{f(1-15)}: 88
MR 0.59
MDER 0.53

Optique

spot
beam angle 19°
UGR < 13 , ≥65° <3000 cd/m²
PstLM ≤ 1.0²
SVM ≤ 0.4²

Electrique

non DIM
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
72 lm/W
insert 84 lm/W


Physique

sans bord
diameter 105 mm
hauteur 75 mm
0.49 kg


Découpe

diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Répartition de la lumière



Dessin de fabrication

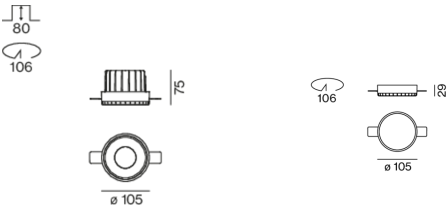

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

