

# SASSO 100 round downlight

trimless

048-2700519S 048-2796117 002-90774



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤13

cd/m²  
≤3000

CRI  
≥90

X-PERT

## Général

Plafond , Encastré  
or , RAL260-M<sup>1</sup>  
Set de montage blanc signalisation  
avant IP44 , arrière IP20  
1910 lm

## LED

3000 K  
CRI ≥ 90  
L80 / 50000 h  
MacAdam initial ≤ 2 SDCM  
R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 88  
MR 0.59  
MDER 0.53

## Optique

spot  
beam angle 19°  
UGR < 13 , ≥65° <3000 cd/m²  
PstLM ≤ 1.0<sup>2</sup>  
SVM ≤ 0.4<sup>2</sup>

## Electrique

non DIM  
29.2 W  
insert 24.8 W  
36 Vf  
700 mA  
CP2 220-240V  
65 lm/W  
insert 77 lm/W

## Physique


sans bord  
diameter 105 mm  
hauteur 75 mm  
0.47 kg

## Découpe


diameter 106 mm  
min. ceiling thickness 12.5 mm  
max. ceiling thickness 25 mm  
recessed depth 80 mm

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

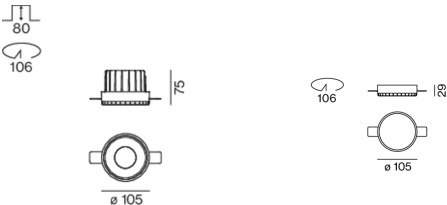

## Notice de montage



## Calculateur d'éclairage

