

SASSO 100 round downlight

trimless exposed concrete

048-2700517W 048-2795210 002-90777



Projet / Type

Notes

Quantité / Date



↑ IP20
↓ IP44

220-240V

UGR
≤22

CRI
≥90

Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 ¹

Set de montage aluminium blanc

avant IP44 , arrière IP20

1690 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 100 , R_f: 91 , R_{f(1-5)}: 88

MR 0.59

MDER 0.53

Optique

wide flood

beam angle 66°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

20.2 W

insert 17.2 W

36 Vf

500 mA

CP2 220-240V

84 lm/W

insert 98 lm/W

Physique

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


hauteur 162 mm

2.6 kg


Découpe

recessed depth 80 mm

Répartition de la lumière



Dessin de fabrication

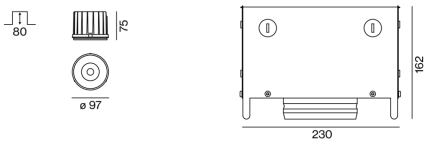

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

