

SASSO 100 round downlight

trimless

048-2700519M 048-2796117 002-90779



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré
or , RAL260-M¹
Set de montage blanc signalisation
avant IP44 , arrière IP20
1450 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88
MR 0.59
MDER 0.53


Optique

medium
beam angle 33°
UGR < 13 , ≥ 65° < 3000 cd/m²
PstLM ≤ 1.0²
SVM ≤ 0.4²


Electrique

DALI-2
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
72 lm/W
insert 85 lm/W
1 DALI Addr.

Répartition de la lumière



Dessin de fabrication

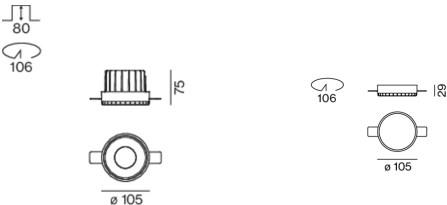

Physique

sans bord
diamètre 105 mm
hauteur 75 mm
0.53 kg

Découpe

diamètre 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

