

# SASSO 100 round downlight

trim

048-2700519F 048-2796318 002-90774



Projet / Type

Notes

Quantité / Date



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤ 16

cd/m<sup>2</sup>  
≤ 3000

CRI  
≥ 90

X-PERT

## Général

Plafond , Encastré

or , RAL260-M<sup>1</sup>

Set de montage Noir profond

avant IP44 , arrière IP20

2140 lm

## LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 88

MR 0.59

MDER 0.53

## Optique

flood

beam angle 44°

UGR < 16 , ≥ 65° < 3000 cd/m<sup>2</sup>

PstLM ≤ 1.0<sup>2</sup>

SVM ≤ 0.4<sup>2</sup>

## Electrique

non DIM

29.2 W

insert 24.8 W

36 Vf

700 mA

CP2 220-240V

73 lm/W

insert 86 lm/W

## Physique

bord

diameter 118 mm

hauteur 75 mm

0.45 kg

## Découpe

diameter 108 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

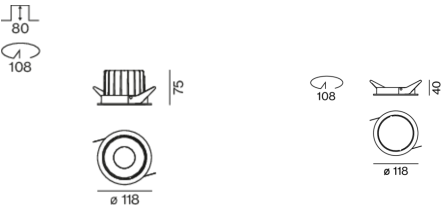

## Notice de montage



## Calculateur d'éclairage

