

SASSO 100 round downlight

trimless exposed concrete

048-2700511M 048-2795210 002-90779



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré _____

rotation 360° _____

noir , RAL9005 ¹ _____

Set de montage aluminium blanc _____

avant IP44 , arrière IP20 _____

1390 lm _____

LED

3000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

MacAdam initial ≤ 2 SDCM _____

R_g: 100 , R_f: 91 , R_{f(1-5)}: 88 _____

MR 0.59 _____

MDER 0.53 _____

Optique

medium _____

beam angle 33° _____

UGR < 13 , ≥65° <1500 cd/m² _____

P_{stLM} ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrique

DALI-2 _____

20.2 W _____

insert 17.2 W _____

36 Vf _____

500 mA _____

CP2 220-240V _____

69 lm/W _____

insert 81 lm/W _____

1 DALI Addr. _____

Physique

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____


hauteur 162 mm _____

2.63 kg _____


Découpe

recessed depth 80 mm _____

Répartition de la lumière



Dessin de fabrication

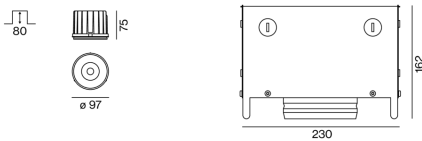

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

