

SASSO 100 round downlight

trimless

048-2700517F 048-2796117 002-90779



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré
blanc , RAL9016 ¹
Set de montage blanc signalisation
avant IP44 , arrière IP20
1650 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 2 SDCM
R_g: 100 , R_f: 91 , R₍₁₋₁₅₎: 88
MR 0.59
MDER 0.53

Optique

flood
beam angle 45°
UGR < 19
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrique

DALI-2
20.2 W
insert 17.2 W
36 Vf
500 mA
CP2 220-240V
82 lm/W
insert 96 lm/W
1 DALI Addr.


Physique

sans bord
diamètre 105 mm
hauteur 75 mm
0.53 kg


Découpe

diamètre 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Répartition de la lumière



Dessin de fabrication

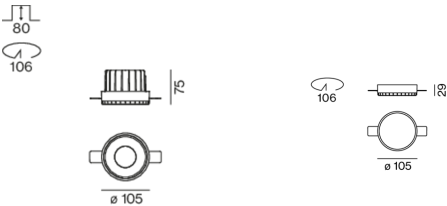

¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

