

# SASSO 100 round downlight

trim

048-2700417S 048-279631G 002-90777



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤ 19

CRI  
≥ 90

X-PERT

## Général

Plafond , Encastré

blanc , RAL9016 <sup>1</sup>

Set de montage aluminium blanc

avant IP44 , arrière IP20

1400 lm

## LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.53

MDER 0.48

## Optique

spot

beam angle 19°

UGR < 19

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrique

non DIM

20.2 W

insert 17.2 W

36 V<sub>f</sub>

500 mA

CP2 220-240V

69 lm/W

insert 81 lm/W

## Physique

bord

diameter 118 mm

hauteur 75 mm

0.47 kg

## Découpe

diameter 108 mm


min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

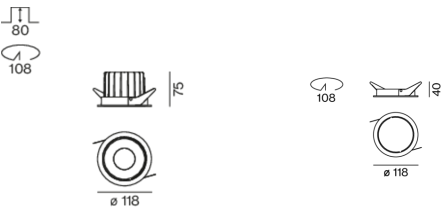

## Notice de montage



## Calculateur d'éclairage

