

# SASSO 100 round downlight

trimless

048-2700417S 048-2796117 002-90777



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



↑ IP20  
↓ IP44

220-240V

X-PERT

UGR  
≤ 19

CRI  
≥ 90

X-PERT

## Général

Plafond , Encastré  
blanc , RAL9016 <sup>1</sup>  
Set de montage blanc signalisation  
avant IP44 , arrière IP20  
1400 lm

## LED

2700 K  
CRI ≥ 90  
L80 / 50000 h  
MacAdam initial ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 89  
MR 0.53  
MDER 0.48

## Optique

spot  
beam angle 19°  
UGR < 19  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrique

non DIM  
20.2 W  
insert 17.2 W  
36 V  
500 mA  
CP2 220-240V  
69 lm/W  
insert 81 lm/W


## Physique

sans bord  
diameter 105 mm  
hauteur 75 mm  
0.49 kg


## Découpe

diameter 106 mm  
min. ceiling thickness 12.5 mm  
max. ceiling thickness 25 mm  
recessed depth 80 mm

## Répartition de la lumière



## Dessin de fabrication

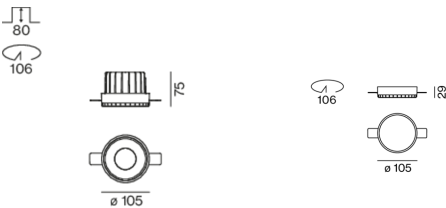

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Notice de montage



## Calculateur d'éclairage

