

SASSO 100 round downlight

trimless exposed concrete

048-2700417S 048-2795210 002-90774



Projet / Type _____

Notes _____

Quantité / Date _____



↑ IP20
↓ IP44

220-240V

360°

X-PERT

UGR ≤ 19

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 ¹

Set de montage aluminium blanc

avant IP44 , arrière IP20

1840 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optique

spot

beam angle 19°

UGR < 19

P_{stLM} ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

29.2 W

insert 24.8 W

36 Vf

700 mA

CP2 220-240V

63 lm/W

insert 74 lm/W

Physique

trimless for exposed concrete ceiling

length 230 mm

width 230 mm

hauteur 162 mm

2.58 kg


Découpe

recessed depth 80 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

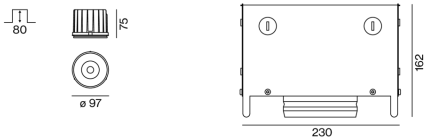

Notice de montage



Calculateur d'éclairage

