

SASSO 100 round downlight

trim

048-2700411M 048-279631G 002-90777



Projet / Type _____

Notes _____

Quantité / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

UGR
≤13

cd/m²
≤1500

CRI
≥90

X-PERT

Général

Plafond , Encastré

noir , RAL9005 ¹

Set de montage aluminium blanc

avant IP44 , arrière IP20

1310 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_r: 91 , R_{t(1-15)}: 89

MR 0.53

MDER 0.48

Optique

medium

beam angle 33°

UGR < 13 , ≥65° <1500 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

20.2 W

insert 17.2 W

36 Vf

500 mA

CP2 220-240V

65 lm/W

insert 76 lm/W

Physique

bord

diameter 118 mm

hauteur 75 mm

0.47 kg

Découpe

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

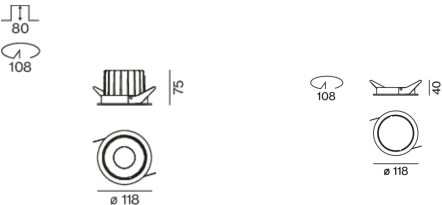

Notice de montage



Calculateur d'éclairage

