

SASSO PRO 100

adjustable offset trim square

048-2410638M 052-1952417



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Encastré
inclinaison max 35°
rotation 360°
noir , RAL9005 ¹
Set de montage blanc signalisation
IP20
1450 lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
MacAdam initial ≤ 3 SDCM
R_g: 97 , R_r: 89 , R₍₁₋₁₅₎: 91
MR 0.85
MDER 0.77

Optique

medium
beam angle 24°
P_{stLM} ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrique

DALI-2
14.7 W
CP2 220-240V
99 lm/W
insert 116 lm/W
1 DALI Addr.

Physique


bord
length 112 mm
width 112 mm
hauteur 106 mm
0.63 kg

Découpe

diameter 108 mm
min. ceiling thickness 5 mm
max. ceiling thickness 25 mm
recessed depth 130 mm

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)


Répartition de la lumière



medium 24°

h (m)	E0° (lx)	ø (m)
1	5680	0.43
2	1420	0.87
3	630	1.30
4	360	1.73
5	230	2.17

Dessin de fabrication

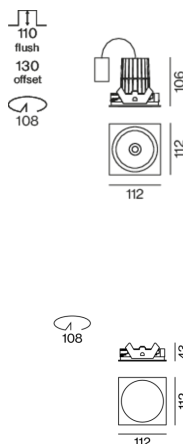

Notice de montage



Calculateur d'éclairage

