



reddot winner 2020

## JANE

semi-recessed / surface / suspended


**EN** Highly flexible light rope made of food grade silicone for creative and decorative design; extremely slim design (only 18 mm diameter); for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools); completely homogeneously illuminated, matt surface; 360° light emission; energy-efficient LEDs with very good colour rendering; optionally with external converter for ceiling installation or suspended in combination with the light rope (available as an accessory)

**FR** Câble lumineux très flexible en silicone de qualité alimentaire pour un design créatif et décoratif ; forme extrêmement élancée (seulement 18 mm de diamètre) ; pour montage en surface au mur/au plafond ou pour montage suspendu (suspension par câble, réglage de la hauteur sans outil) ; surface mate, éclairée de manière totalement homogène ; diffusion de lumière à 360° ; LED économes en énergie à restitution de couleur élevée ; convertisseur externe en option pour encastrement dans le plafond ou montage suspendu en combinaison avec le câble lumineux (disponible comme accessoire)

### Quickinfo

3000 K, 4000 K  
CRI ≥ 90, 3 SDCM  
up to 1000 lm/m  
up to 71 lm/W  
L80 @ 50 000 h  
non DIM, DALI  
IP 40

### Types

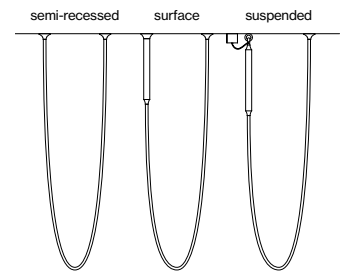

ø18 x 1000-10 000


### Canopy colours



### Light distribution




360°



many mounting options



dust and insect protection (IP40)



360° light emitting

### Order options

<b>COLOUR TEMPERATURE</b>	☐☐
3000K	5
4000K	6


<b>CONTROL</b>	⬆️⬆️
non DIM	1
DALI	3

<b>LENGTH</b>	L
1000 mm	1
2000 mm	2
3000 mm	3
4000 mm	4
6000 mm	6
8000 mm	8
10000 mm	0

<b>MATERIAL COLOUR</b>	☑️
○ traffic white RAL 9016	7
● jet black RAL 9005	8



### JANE semi-recessed / surface / suspended





#### LUMINAIRE

<b>SYSTEM POWER</b>	<b>COLOUR TEMP.</b>	<b>LUMINOUS FLUX</b>	<b>ORDER CODE</b>
14.4W/m	3000K	812lm/m	058-651 L::10
	4000K	1000lm/m	

### Mounting accessories

#### MOUNTING ACCESSORIES

TYPE	L-W-H (mm)	ORDER CODE
1 mounting set recessed	∅74-100	058-659021 ☑️
2 mounting set surface	∅74-39	058-659101 ☑️
3 mounting set suspended	∅50/30-135	058-659201 ☑️
4 clip surface (transparent)	15-21-24	058-6591410
5 channel surface (transparent)	1000-21-24	058-6591110
6 mounting ring surface	∅39-9-61	058-659161 ☑️
7 mounting ring suspended	∅39-9	058-659261 ☑️

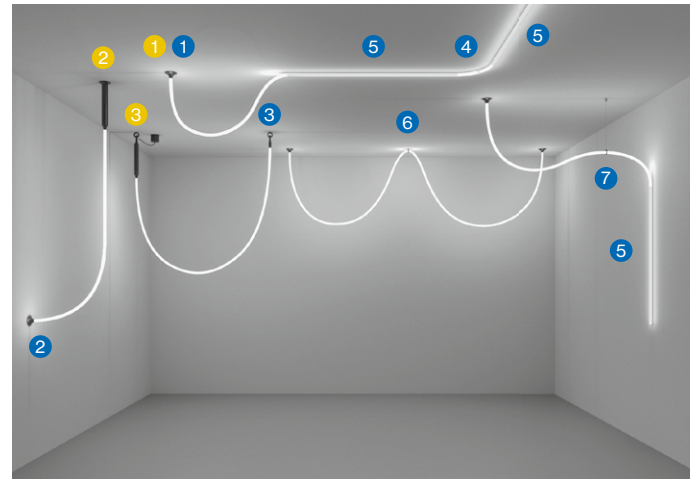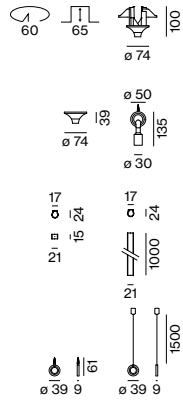

various mounting options with different mounting accessories

### Electrical accessories



<b>1 POWER SUPPLY RECESSED</b> 220-240 V AC, 48V, 50-60Hz		
<b>TYPE</b>	<b>L-W-H (mm)</b>	<b>ORDER CODE</b>
100 W recessed ☐ PC II	350-30-18	002-62134
150 W recessed ☐ PC II	350-30-18	002-62135
60 W revision opening ☐ PC II	163-43-32	002-62133
100 W revision opening ☐ PC II	350-30-18	002-62134
150 W revision opening ☐ PC II	350-30-18	002-62135
250 W revision opening ☐ PC II	400-40-22	002-62139
320 W revision opening ☐ PC I	252-90-44	002-60320
DALI device	120-30-22	058-6599330

<b>2 POWER SUPPLY SURFACE</b> 220-240 V AC, 48V, 50-60Hz		
<b>TYPE</b>	<b>L-∅ (mm)</b>	<b>ORDER CODE</b>
100 W surface ☐ PC II	584-∅40	058-65912 ☑️☑️
150 W surface ☐ PC II	584-∅40	058-65913 ☑️☑️

<b>3 POWER SUPPLY SUSPENDED</b> 220-240 V AC, 48V, 50-60Hz		
<b>TYPE</b>	<b>L-∅ (mm)</b>	<b>ORDER CODE</b>
100 W suspended ☐ PC II	639-∅40	058-65922 ☑️☑️
150 W suspended ☐ PC II	639-∅40	058-65923 ☑️☑️
incl. ceiling canopy and 2000mm power cable		

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, rope silicone