

SASSO 100 round downlight

trimless

048-2700E14W 048-2796117 002-90776



Projet / Type _____

Notes _____

Quantité / Date _____



↑ IP20
↓ IP40

220-240V

X-PERT

UGR ≤22

CRI ≥90

1 ADDR.

X-PERT

Général

Plafond , Encastré

argent mat

Set de montage blanc signalisation

avant IP40 , arrière IP20

2260 lm

LED

colour warm dimming

1800 K - 3000 K

CRI ≥ 90

L90 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 100 , R_f: 89 , R_(f-15): 89

MR 0.56

MDER 0.51

Optique

wide flood

beam angle 51°

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

DALI-2

28.0 W

insert 23.8 W

700 mA

CP2 220-240V

81 lm/W

insert 95 lm/W

1 DALI Addr.

Physique

sans bord

diameter 105 mm

hauteur 75 mm

0.52 kg

Découpe

diameter 106 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

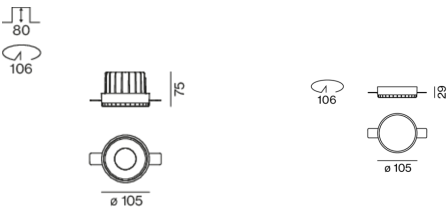

Notice de montage



Calculateur d'éclairage

