

# SASSO 100 round downlight

trimless

048-2700E11W 048-2796117 002-90776



Projet / Type

Notes

Quantité / Date



↑ IP20  
↓ IP40

220-240V

X-PERT

UGR  
≤22

CRI  
≥90

1 ADDR.

X-PERT

### Général

Plafond , Encastré

noir , RAL9005 <sup>1</sup>

Set de montage blanc signalisation

avant IP40 , arrière IP20

2160 lm

### LED

colour warm dimming

1800 K - 3000 K

CRI ≥ 90

L90 / 50000 h

MacAdam initial ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>f(1-5)</sub>: 89

MR 0.56

MDER 0.51

### Optique

wide flood

beam angle 51°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrique

DALI-2

28.0 W

insert 23.8 W

700 mA

CP2 220-240V

77 lm/W

insert 91 lm/W

1 DALI Addr.

### Physique

sans bord

diameter 105 mm

hauteur 75 mm

0.52 kg

### Découpe

diameter 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


<sup>1</sup> Code RAL

<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

### Répartition de la lumière



### Dessin de fabrication

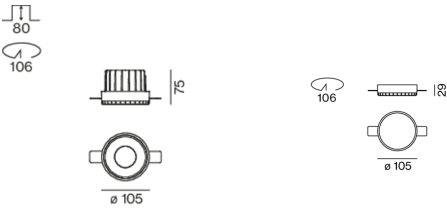

### Notice de montage



### Calculateur d'éclairage

