

# SASSO 100 round downlight

trimless

048-2700E17W 048-2796117 002-90776



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



## Général

Plafond , Encastré  
blanc , RAL9016 <sup>1</sup>  
Set de montage blanc signalisation  
avant IP40 , arrière IP20  
2240 lm

## LED

colour warm dimming  
1800 K - 3000 K  
CRI ≥ 90  
L90 / 50000 h  
MacAdam initial ≤ 3 SDCM  
R<sub>g</sub>: 100 , R<sub>f</sub>: 89 , R<sub>f(1-5)</sub>: 89  
MR 0.56  
MDER 0.51

## Optique

wide flood  
beam angle 51°  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrique

DALI-2  
28.0 W  
insert 23.8 W  
700 mA  
CP2 220-240V  
80 lm/W  
insert 94 lm/W  
1 DALI Addr.


## Physique

sans bord  
diameter 105 mm  
hauteur 75 mm  
0.52 kg


## Découpe

diameter 106 mm  
min. ceiling thickness 12.5 mm  
max. ceiling thickness 25 mm  
recessed depth 80 mm

## Répartition de la lumière



## Dessin de fabrication

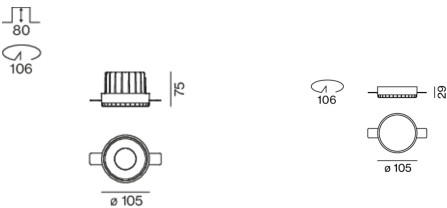

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Notice de montage



## Calculateur d'éclairage

