



TASK

free standing double long

EN Free standing luminaire with two rectangular luminaire head made of aluminium and rounded edges; luminaire heads arranged linear; ultra low-profile design (only 15 mm); rectangular downpipe; pedestal with recess for table base; surface powder coated; direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed up and down by laser engraving; optional: indirect component with special PCBs for increased luminous flux; optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug

FR Luminaire sur pied avec deux têtes de luminaire rectangulaires en aluminium et bords arrondis ; têtes de luminaire, disposées au choix en alignées ; forme extrêm. plate (15 mm seulement) ; tube rectangulaire ; pied avec échancrure pour pied de table ; surface thermo-laquée ; distribution de lumière directe/indirecte par LGP-Body (Light Guiding Prism) ; lumière couplée latéralement par gravure laser, dirigée vers le haut et le bas ; en option : partie indirecte avec platines dédiées pour un flux lumineux accru ; en option : partie éclairage indirect avec platines en biais dédiées pour une caractéristique de diffusion asymétrique ; éclairage parfaitement homogène ; LED économes en énergie à restitution de couleur élevée ; interrupteur intégré dans le tube ; incl. câble raccordement (3m) avec fiche contact de protection

Quickinfo

3000 K, 4000 K
 CRI ≥ 90
 UGR ≤ 19 / $65^\circ \leq 3000 \text{ cd/m}^2$
 up to 258 lm/W
 L90 @ 50 000 h
 touch DIM on pole (one for each head)
 brightness & presence sensor
 microprismatic (UGR ≤ 19)

Type



Colours



standard

Light distributions



direct
indir.
soft

direct
indir.
asym.
power




SENSE sensor
on request



control by touch
DIM on pole



tunable white
2700–6500 K



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE	☐☐
3000K	0
4000K	1

CONTROL	⬆️⬆️
touch DIM on pole	5
ESSENTIAL sensor (brightness & presence)	7

MATERIAL COLOUR	☑️
○ pure white RAL 9010	7
● white aluminium RAL 9006	6
● jet black RAL 9005	8


LIGHT OPTIC COVER	
microprismatic (UGR ≤ 19)	

Options on request

COLOUR TEMPERATURE	
tunable white 2700–6500K indir.	

COLOUR RENDERING INDEX	
CRI ≥ 80	
CRI ≥ 98 XPECTRUM	

CONTROL	
SENSE sensor (brightness, presence, temperature, sound pressure, humidity, CO ₂)	
cluster network DIM	
dynamic daylight control (BPI)	
Zigbee 3.0	

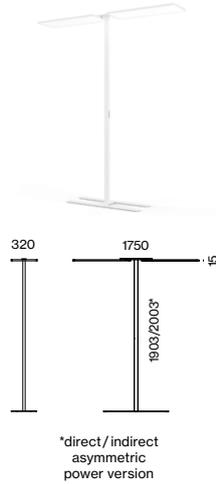


TASK free standing double long




DIRECT / INDIRECT SOFT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
143W	3000K	↓8210/↑6690lm	X 0 5 9 - 2 9 0 3 ☐☐☐☐Z
	4000K	↓8740/↑7120lm	



DIRECT / INDIRECT POWER


SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
161W	3000K	↓4800/↑14700lm	X 0 5 9 - 2 9 0 2 ☐☐☐☐Z
	4000K	↓5110/↑15600lm	




DIRECT / INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
195W	3000K	↓3810/↑18600lm	X 0 5 9 - 2 9 0 1 ☐☐☐☐Z
	4000K	↓4050/↑19900lm	


Light distributions




microprismatic
direct/indirect soft



microprismatic
direct/indirect power



microprismatic
direct/indirect asym. power

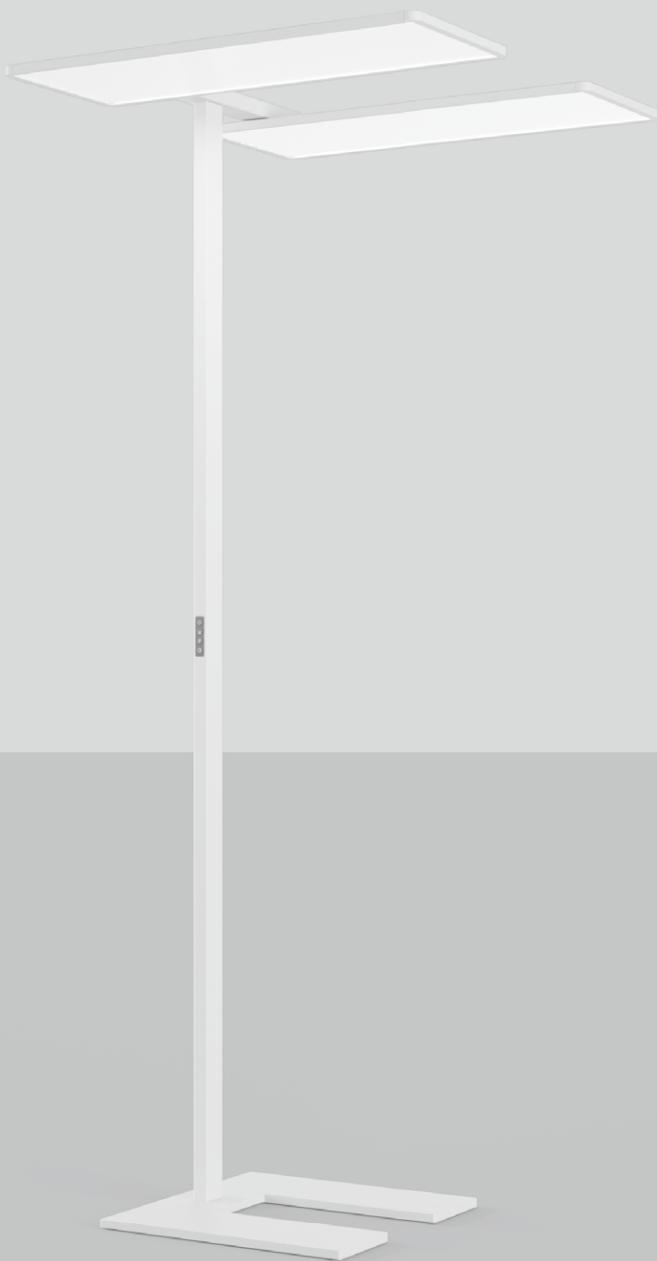

TASK

free standing double


EN Free standing luminaire with two rectangular luminaire head made of aluminium and rounded edges; luminaire heads arranged parallel; ultra low-profile design (only 15 mm); rectangular downpipe; pedestal with recess for table base; surface powder coated; direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed up and down by laser engraving; optional: indirect component with special PCBs for increased luminous flux; optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug

FR Luminaire sur pied avec deux têtes de luminaire rectangulaires en aluminium et bords arrondis ; têtes de luminaire, disposées au choix ; forme extrêm. plate (15mm seulement) ; tube rectangulaire ; pied avec échancrure pour pied de table ; surface thermolaquée ; distribution de lumière directe/indirecte par LGP-Body (Light Guiding Prism) ; lumière couplée latéralement par gravure laser, dirigée vers le haut et le bas ; en option : partie indirecte avec platines dédiées pour un flux lumineux accru ; en option : partie éclairage indirect avec platines en biais dédiées pour une caractéristique de diffusion asymétrique ; éclairage parfaitement homogène ; LED économes en énergie à restitution de couleur élevée ; interrupteur intégré dans le tube ; incl. câble raccordement (3m) avec fiche contact de protection

Quickinfo

3000 K, 4000 K
 CRI ≥ 90
 UGR ≤ 19 / 65° ≤ 3000 cd/m²
 up to 258 lm/W
 L90 @ 50 000h
 touch DIM on pole (one for each head)
 brightness & presence sensor
 microprismatic (UGR ≤ 19)

Type

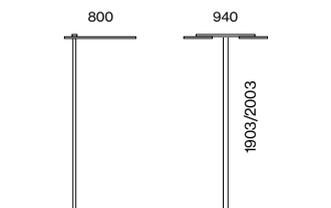

Colours



standard

Light distributions



direct
indir.
soft

direct
indir.
asym.
power



SENSE sensor
on request



control by touch
DIM on pole



tunable white
2700–6500K



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE	☐☐
3000K	0
4000K	1

CONTROL	⬆️⬆️
touch DIM on pole	5
ESSENTIAL sensor (brightness & presence)	7

MATERIAL COLOUR	☑️
○ pure white RAL 9010	7
● white aluminium RAL 9006	6
● jet black RAL 9005	8

LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)

Options on request


COLOUR TEMPERATURE
tunable white 2700–6500K indir.

COLOUR RENDERING INDEX

CRI ≥ 80
CRI ≥ 98 XPECTRUM

CONTROL

SENSE sensor (brightness, presence, temperature, sound pressure, humidity, CO ₂)
cluster network DIM
dynamic daylight control (BPI)
Zigbee 3.0

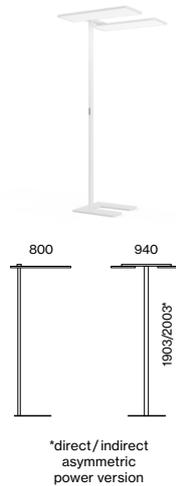


TASK free standing double




DIRECT / INDIRECT SOFT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
143W	3000K	↓8210/↑6690lm	X 0 5 9 - 2 9 6 3 ☐☐☐Z
	4000K	↓8740/↑7120lm	



DIRECT / INDIRECT POWER


SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
161W	3000K	↓4800/↑14700lm	X 0 5 9 - 2 9 6 2 ☐☐☐Z
	4000K	↓5110/↑15600lm	




DIRECT / INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
195W	3000K	↓3810/↑18600lm	X 0 5 9 - 2 9 6 1 ☐☐☐Z
	4000K	↓4050/↑19900lm	


Light distributions



microprismatic
direct/indirect soft



microprismatic
direct/indirect power



microprismatic
direct/indirect asym. power