

# SASSO 100 round adjustable

trim

048-2720417X 048-2796317 002-90776



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



## Général

Plafond , Encastré  
inclinaison max 30°  
rotation 360°  
blanc , RAL9016 <sup>1</sup>  
Set de montage blanc signalisation  
avant IP40 , arrière IP20  
1900 lm

## LED

2700 K  
CRI ≥ 90  
L80 / 50000 h  
MacAdam initial ≤ 2 SDCM  
R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>t(1-15)</sub>: 89  
MR 0.53  
MDER 0.48

## Optique

super wide flood  
beam angle 63°  
P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrique

DALI-2  
29.2 W  
insert 24.8 W  
36 Vf  
700 mA  
CP2 220-240V  
65 lm/W  
insert 77 lm/W  
1 DALI Addr.


## Physique

bord  
diameter 118 mm  
hauteur 95 mm  
0.48 kg


## Découpe

diameter 108 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 100 mm

## Répartition de la lumière



## Dessin de fabrication

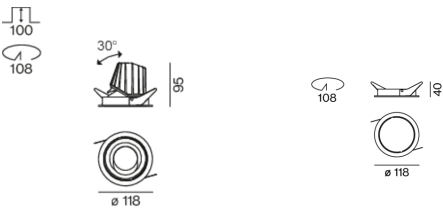

<sup>1</sup> Code RAL

<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

## Notice de montage



## Calculateur d'éclairage

