

SASSO 100 square downlight

trimless

048-2710417X 048-2797117 002-90779



Projet / Type _____

Notes _____

Quantité / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

CRI ≥ 90

DALI-2 1ADDR.

X-PERT

Général

Plafond , Encastré

blanc , RAL9016 ¹

Set de montage blanc signalisation

avant IP44 , arrière IP20

1430 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optique

super wide flood

beam angle 69°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

20.2 W

insert 17.2 W

36 Vf

500 mA

CP2 220-240V

71 lm/W

insert 83 lm/W

1 DALI Addr.

Physique

sans bord

length 105 mm

width 105 mm

hauteur 75 mm

0.56 kg

Découpe

length 106 mm

width 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm


¹ Code RAL

² Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

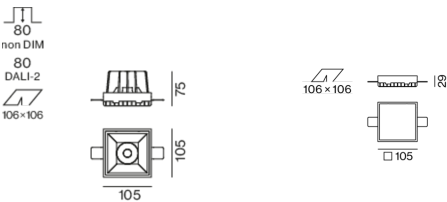

Notice de montage



Calculateur d'éclairage

