

SASSO 100 round downlight

trimless

048-2700617X 048-2796117 002-90774



Projet / Type

Notes

Quantité / Date



↑ IP20
↓ IP44

220-240V

X-PERT

CRI
≥ 90

X-PERT

Général

Plafond , Encastré

blanc , RAL9016 ¹

Set de montage blanc signalisation

avant IP44 , arrière IP20

2170 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 97 , R_f: 90 , R₍₁₋₁₅₎: 89

MR 0.81

MDER 0.74

Optique

super wide flood

beam angle 69°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

non DIM

29.2 W

insert 24.8 W

36 Vf

700 mA

CP2 220-240V

74 lm/W

insert 87 lm/W

Physique

sans bord

diameter 105 mm

hauteur 75 mm

0.51 kg

Découpe


diameter 106 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 80 mm

Répartition de la lumière



Dessin de fabrication

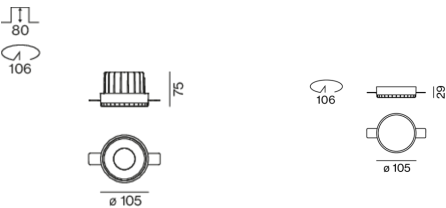

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

