

# SASSO 100 round downlight

trimless exposed concrete

048-2700417X 048-2795210 002-90774



Projet / Type

Notes

Quantité / Date



↑ IP20

↓ IP44

220-240V

↺

↻

X-PERT

CRI

≥ 90

X-PERT

### Général

Plafond , Encastré

rotation 360°

blanc , RAL9016 <sup>1</sup>

Set de montage aluminium blanc

avant IP44 , arrière IP20

1930 lm

### LED

2700 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.53

MDER 0.48

### Optique

super wide flood

beam angle 69°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrique

non DIM

29.2 W

insert 24.8 W

36 Vf

700 mA

CP2 220-240V

66 lm/W

insert 78 lm/W

### Physique

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


hauteur 162 mm

2.57 kg


### Découpe

recessed depth 80 mm

### Répartition de la lumière



### Dessin de fabrication

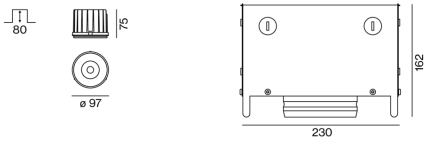

<sup>1</sup> Code RAL  
<sup>2</sup> Valeur du produit contenant à pleine charge (non atténué)

### Notice de montage



### Calculateur d'éclairage

