

SASSO 100 round wallwasher

trimless exposed concrete

048-2740614A 048-2795210 002-90774



Projet / Type _____

Notes _____

Quantité / Date _____



220-240V

360°

X-PERT

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage aluminium blanc

IP20

2220 lm

LED

4000 K

CRI ≥ 90

L70 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 94 , R_f: 87 , R_(f-15): 86

MR 0.8

MDER 0.72

Optique

wallwasher

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

non DIM

29.4 W

insert 25.0 W

36 Vf

350 mA

CP2 220-240V

76 lm/W

insert 89 lm/W

Physique

trimless for exposed concrete ceiling

length 230 mm

width 230 mm

hauteur 162 mm


2.78 kg

Découpe


recessed depth 120 mm

¹ Valeur du produit contenant à pleine charge (non atténué)

Répartition de la lumière



Dessin de fabrication

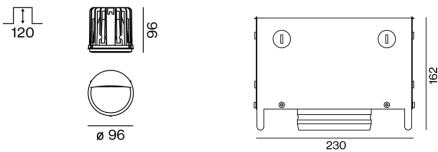

Notice de montage



Calculateur d'éclairage

