

SASSO 100 round wallwasher/floor

trimless exposed concrete

048-2740519W 048-2795210 002-90776



Projet / Type

Notes

Quantité / Date



220-240V

360°

X-PERT

CRI ≥ 90

X-PERT

Général

Plafond , Encastré

rotation 360°

or , RAL260-M ¹

Set de montage aluminium blanc

IP20

2660 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

MacAdam initial ≤ 2 SDCM

R_g: 100 , R_f: 91 , R_{f(1-5)}: 88

MR 0.59

MDER 0.53

Optique

wallwasher floor

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrique

DALI-2

27.5 W

insert 23.4 W

36 Vf

700 mA

CP2 220-240V

97 lm/W

insert 114 lm/W

Physique

trimless for exposed concrete ceiling

length 230 mm

width 230 mm


hauteur 162 mm

2.82 kg


Découpe

recessed depth 100 mm

Répartition de la lumière



Dessin de fabrication

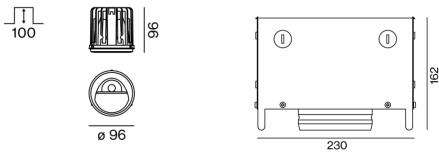

¹ Code RAL
² Valeur du produit contenant à pleine charge (non atténué)

Notice de montage



Calculateur d'éclairage

