

SASSO 100 round wallwasher/floor

trimless exposed concrete

048-2740614W 048-2795210 002-90776



Projet / Type

Notes

Quantité / Date



Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage aluminium blanc

IP20

2770 lm

LED

4000 K

CRI \geq 90

L80 / 50000 h

MacAdam initial \leq 2 SDCM

R_g: 97 , R_f: 90 , R₍₁₋₁₅₎: 89

MR 0.81

MDER 0.74

Optique

wallwasher floor

PstLM \leq 1.0 ¹

SVM \leq 0.4 ¹

Electrique

DALI-2

système 27.5 W

insert 23.4 W

36 Vf

700 mA

CP2 220-240V

système 101 lm/W²

insert 118 lm/W³

Physique

sans bordure pour plafond en béton apparent

longueur 230 mm

largeur 230 mm


hauteur 162 mm

2.82 kg


Découpe

profondeur de l'encastrement 100 mm

Répartition de la lumière



Dessin de fabrication

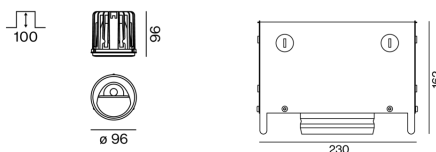

¹ Valeur du produit contenant à pleine charge (non atténué)

² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Notice de montage



Calculateur d'éclairage

