

# SASSO 100 round wallwasher

trimless exposed concrete

048-2740414A 048-2795210 002-90776



Projet / Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantité / Date \_\_\_\_\_



220-240V

360°

X-PERT

CRI ≥ 90

X-PERT

## Général

Plafond , Encastré

rotation 360°

argent mat

Set de montage aluminium blanc

IP20

2050 lm

## LED

2700 K

CRI ≥ 90

L70 / 50000 h

MacAdam initial ≤ 3 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 90

MR 0.53

MDER 0.48

## Optique

wallwasher

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

## Electrique

DALI-2

29.4 W

insert 25.0 W

36 Vf

350 mA

CP2 220-240V

70 lm/W

insert 82 lm/W

## Physique

trimless for exposed concrete ceiling

length 230 mm

width 230 mm

hauteur 162 mm


2.82 kg

## Découpe


recessed depth 120 mm

<sup>1</sup> Valeur du produit contenant à pleine charge (non atténué)

## Répartition de la lumière



## Dessin de fabrication

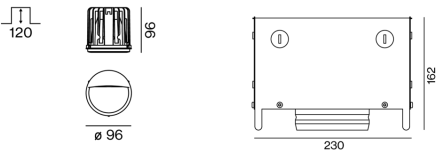

## Notice de montage



## Calculateur d'éclairage

