

MOVE IN 45 round

trimless

063-8121514V 063-8812117 002-90729



Projet / Type _____

Notes _____

Quantité / Date _____



Général

Plafond , Demi-encastré

chrome

IP20

346 lm

LED

3000 K

CRI ≥ 90

L85 / 50000 h

MacAdam initial ≤ 3 SDCM

R_g: 98 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.6

MDER 0.55

Optique

super spot

beam angle 8°

PstLM ≤ 1.0 ¹

SVM ≤ 0.4 ¹

Electrique

DALI-2

9.2 W

insert 6.9 W

11 Vf

600 mA

CP2 220-240V

38 lm/W

1 DALI Addr.

Physique

sans bord

diameter 75 mm

hauteur 106 mm

0.26 kg

Découpe


diameter 65 mm

min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 195 mm


Répartition de la lumière



super spot 8°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 12100 | 0.14 |
| 2 | 3000 | 0.28 |
| 3 | 1300 | 0.41 |
| 4 | 800 | 0.55 |
| 5 | 500 | 0.69 |

Dessin de fabrication

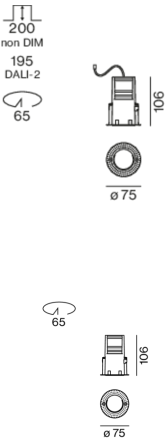

¹ Valeur du produit contenant à pleine charge (non atténué)

Notice de montage

Calculateur d'éclairage